




Hangzhou Risingsun Cable Co., Ltd

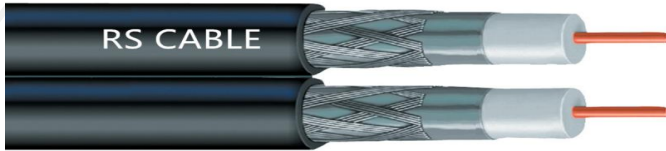

CT63

Construction	Material	Diameter(mm)
Inner Conductor	Bare Copper	0.65
Dielectric	Foam PE	2.90
First Shield	Aluminum Foil	3.12
Second Shield	83% Tinned Copper Wire Braid	/
Jacket	PVC/LSZH	4.70

Electrical Characteristics

Capacitance(pF/m)	54±2
Impedance(Ω)	75±3
Velocity of Propagation(%)	84.0
Return Loss(dB)	
5-470MHz	≥23
470-862MHz	≥20
862-2150MHz	≥15
Spark Test(VAC)	4000
Operating Temp Range(°C)	-40 to 85

Attenuation (20 °C)

Frequency(Mhz)	Max Attenuation(dB/100m)
5	2.7
50	7.5
100	10.0
200	13.8
460	21.4
860	30.0
1000	32.5
1750	42.2
2150	47.0

HANGZHOU RISINGSUN CABLE CO.,LTD

Add:1188 Jinxi Rd.s Linglong Industrial Zone Lin'an,Zhejiang,China

Tel: 86-571-63766698

Fax: 86-571-63766808

Web:www.rscable.com