




Hangzhou Risingsun Cable Co., Ltd

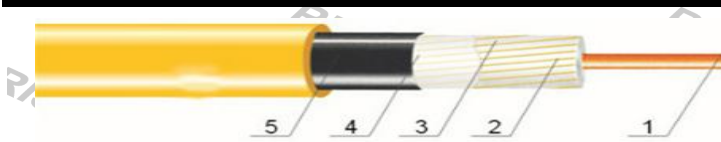

Leaky Feeder Cable

Construction	Material	Diameter(mm)
Inner Conductor	Bare Copper	2.31
Dielectric	Physical Foam Polyethylene	9.5
Outer Conductor	Copper Wire	11.0
Inner Jacket	Flame Retardant PE	13.3
Outer Jacket	LSZH	15.2

Electrical Characteristics

Capacitance(pF/m)	52	Min Bending Radius(mm)	50
Impedance(Ω)	75	Crush Resistance kg/mm ²	0.70
Rated Peak Power(KW)	15	Tensile Strength(kg)	90
Dielectric Strength KV	1.6	Installation Temp/°C	-25~+70
Insulation Resistance(MΩ.km)	≥10000	Operating Temp/°C	-25~+70
C D Withstand Voltage V	3000	VSWR	≤1.2
Inner Conductor DCR(Ohm/km)	1.05		

Frequency(Mhz)	Attenuation(dB/100m)	Average Power(KW)
30	1.80	3.02
85	3.10	1.74
150	4.20	1.31

HANGZHOU RISINGSUN CABLE CO.,LTD

Add:1188 Jinxi Rd.s Linglong Industrial Zone Lin'an,Zhejiang,China
 Tel: 86-571-63766698 Fax: 86-571-63766808
 Web:www.rscable.com